

# Drop clamp UO

## Description

**Drop clamp UO** is installed on poles and walls to terminate fiber optic or copper round drop cables in distribution networks designed to provide suspensions for 2-8 mm aerial fibre cables.




## Application

Overhead data communication lines.

## Properties

Symbol	Range of cable diameter [mm]	Minimum breaking load [daN]	Weight [kg]
UO	2 - 6	180	0,06

## Photos

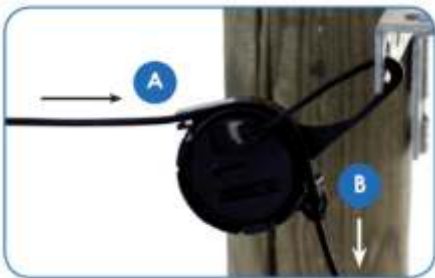

## How to order

UO      Drop clamp UO