

Telescopic Fiber Optic Distribution Frame 19" 1U Q-Fiber

Description

Telescopic Fiber Optic Distribution Frame 19" 1U Q-Fiber consists of the box and distribution board. A box with a distribution board installed on telescopes (extension 110%) guarantees the highest comfort of work both at the installation process and during subsequent maintenance works. The front panel is available in the version integrated with the drawer or as a replaceable element. Cable outlet adapted for installation of cable glands M16, M20 as well as cables ending with the Fiber Quick form. Movable side holders make it possible to withdraw the ODF by 30 mm from the mounting plane.



Application

Telecommunication, CATV, Monitoring, Industry, LAN, MAN, WAN, FTTx, PON.

Properties

- Made of 1.2mm steel sheet,
- Extension 110% on telescopic rails ,
- Embossing to attach cables inside the box,
- Boltless mounting of adapters,
- Standard color RAL7035 (light grey) glossy, RAL 9005 (black mat structure), other colors on request,
- Dimensions [H x W x D]: 44,45x483x230 [mm],
- Temporary side handles allow the withdrawal of ODF 19" by 30 mm.

Photos and dimensions




Front panels



FP191U12ST-T




FP191U12CS-T




FP191U36CS-T




FP191U12CD-T




FP191U24EC-T




FP191U24ST-T



FP191U24CS-T



FP191U48CS-T




FP191U24CD-T



FP191UOVAL-T

DUAL

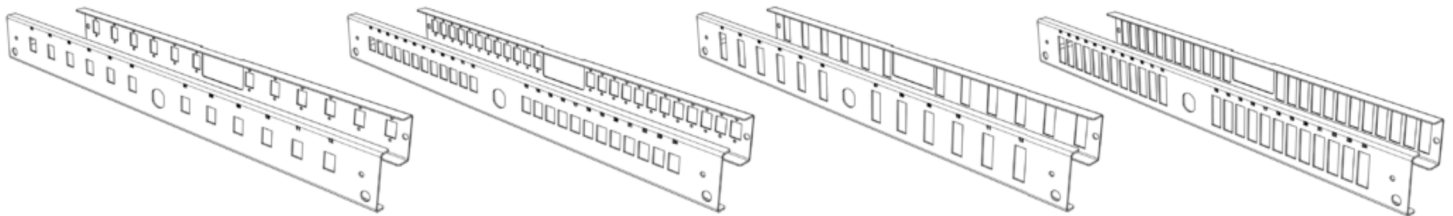

FP191U12DS-T

FP191U24DS-T

FP191U12DD-T

FP191U24DD-T

How to order

ODF-19-1U-T*	Telescopic fiber optic distribution frame 19" 1U
ODF-19-1U-T-Z*	Telescopic fiber optic distribution frame 19" 1U with a lock
PK191U70-T	Cabel overlength guide 70mm
FP191U12ST-T	Front Panel 19" 1U 12xST/FC/DIN d-hole
FP191U24ST-T	Front Panel 19" 1U 24xST/FC/DIN d-hole
FP191U12CS-T	Front Panel 19" 1U 12xSC/E2000 simplex**
FP191U24CS-T	Front Panel 19" 1U 24xSC/E2000 simplex**
FP191U36CS-T	Front Panel 19" 1U 36xSC/E2000 simplex**
FP191U48CS-T	Front Panel 19" 1U 48xSC/E2000 simplex**
FP191U12CD-T	Front Panel 19" 1U 12xSC/ST/FC duplex / LC quad
FP191U24CD-T	Front Panel 19" 1U 24xSC/ST/FC duplex / LC quad
FP191U24EC	Front Panel 19" 1U 24xE2000 Compact
FP191U12DS-T	Front Panel 19" 1U 12xSC/E2000 simplex** DUAL
FP191U24DS-T	Front Panel 19" 1U 24xSC/E2000 simplex** DUAL
FP191U12DD-T	Front Panel 19" 1U 12xSC/E2000 duplex DUAL
FP191U24DD-T	Front Panel 19" 1U 24xSC/E2000 duplex DUAL
FP191UOVAL-T	Front Panel 19" OVAL

* it is possible to order a ODF with an integrated front panel as well as with extended(bolted) adapters

**suitable for LC/LX.5/MTRJ duplex SC foot print adapters

Information

- The ODF houses two cassettes DIN24 or four cassettes DIN24 WHITE,
- Product adapted to the FiberQuick system,
- 1U ODF 19" packed in a cardboard box.

Standard equipment

- Cable gland M16x1,5 (cable \varnothing 5,5÷10mm) (1pc),
- Mounting screw M6 (4 pcs),
- Knurled nut M5 (1 pc),
- Snaps (2 psc).

Additional equipment

- Cable gland M20x1,5 (cable \varnothing 6÷13mm),
- Nylon cable tie 80x2.5mm,
- Pigtails,
- Splice trays,
- Adapters.